



**Technical specification**

**3~ 50 Hz**

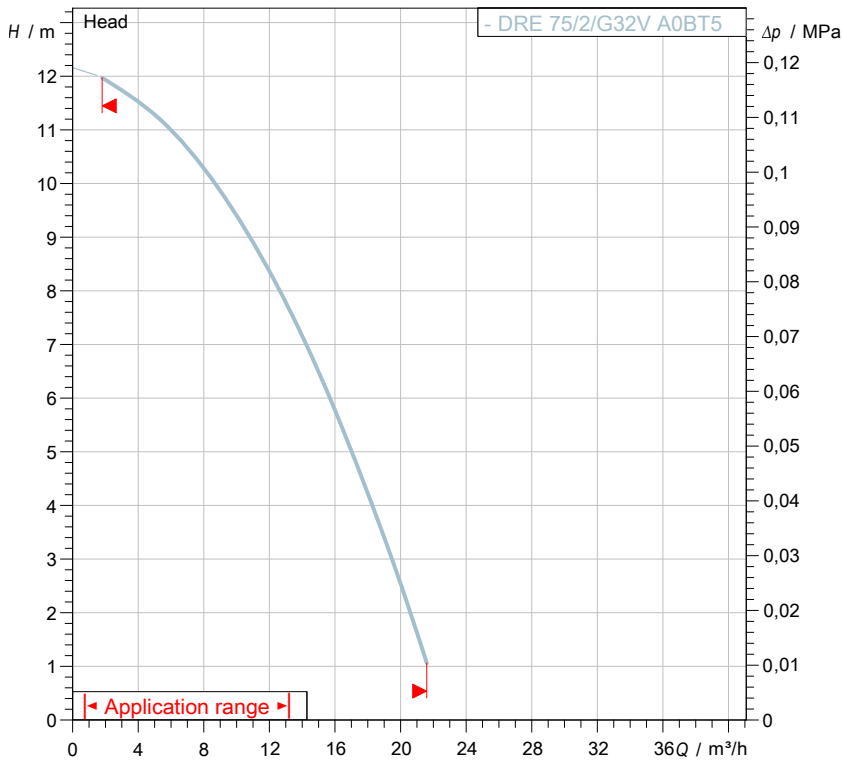

Characteristic curves according to UNI EN ISO 9906:2012

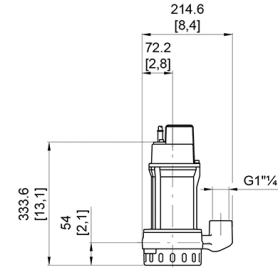

[ mm ]  
[ inch ]

**Pump**

Series	E series
Pump name	DRE 75/2/G32V A0BT5
Configuration	NGNAQ21040N00NN
Standard	EN 809:2009

**Motor data**

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	2
Rated power P2	0,6 kW
Incoming power P1	0,8 kW
Rated current	1,3 A
rpm	2830 1/min
Efficiency	72,2 %
cos φ	0,82
Rated torque	1,9 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	F

**Hydraulic**

Type	DR (Multi-channel open)
Free passage	15 mm
Impeller type	Multi channel impeller
Discharge	G 1" 1/4 -
Curve tolerance	UNI EN ISO 9906:2012

**Operating limits (standard pumps)**

Max. ambient temperature	40 °C
Max. density treated liquid	1 100 kg/m³
Max. immersion depth	20 m
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

**Construction materials**

Case	Cast iron EN-GJL 250
Shaft	Stainless steel - AISI 420
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 80 µm
Screws	Stainless steel - Class A2-70
Gaskets	NBR
Strainer	Stainless steel - AISI 304

**Construction features**

Cooling system	No cooling jacket
Main cable	4G1
Control cable	-
Cable length	10 mt
Mechanical seals	1 in silicon carbide and 1 lip seal
Additional drilling	-
Weight*	13 kg
Electrical variant	No electrical device equipped

\* cable's weight not included



water solutions

Data sheet


# SAT 75/2/32/D-DRE 75/2/G32VA0BT5

# E series

## Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)	Impeller type Multi channel impeller	Free passage 15 mm	Discharge G 1" 1/4	Suction -	
<b>DUTY POINT</b>					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m <sup>3</sup>	Viscosity 1,005 mm <sup>2</sup> /s

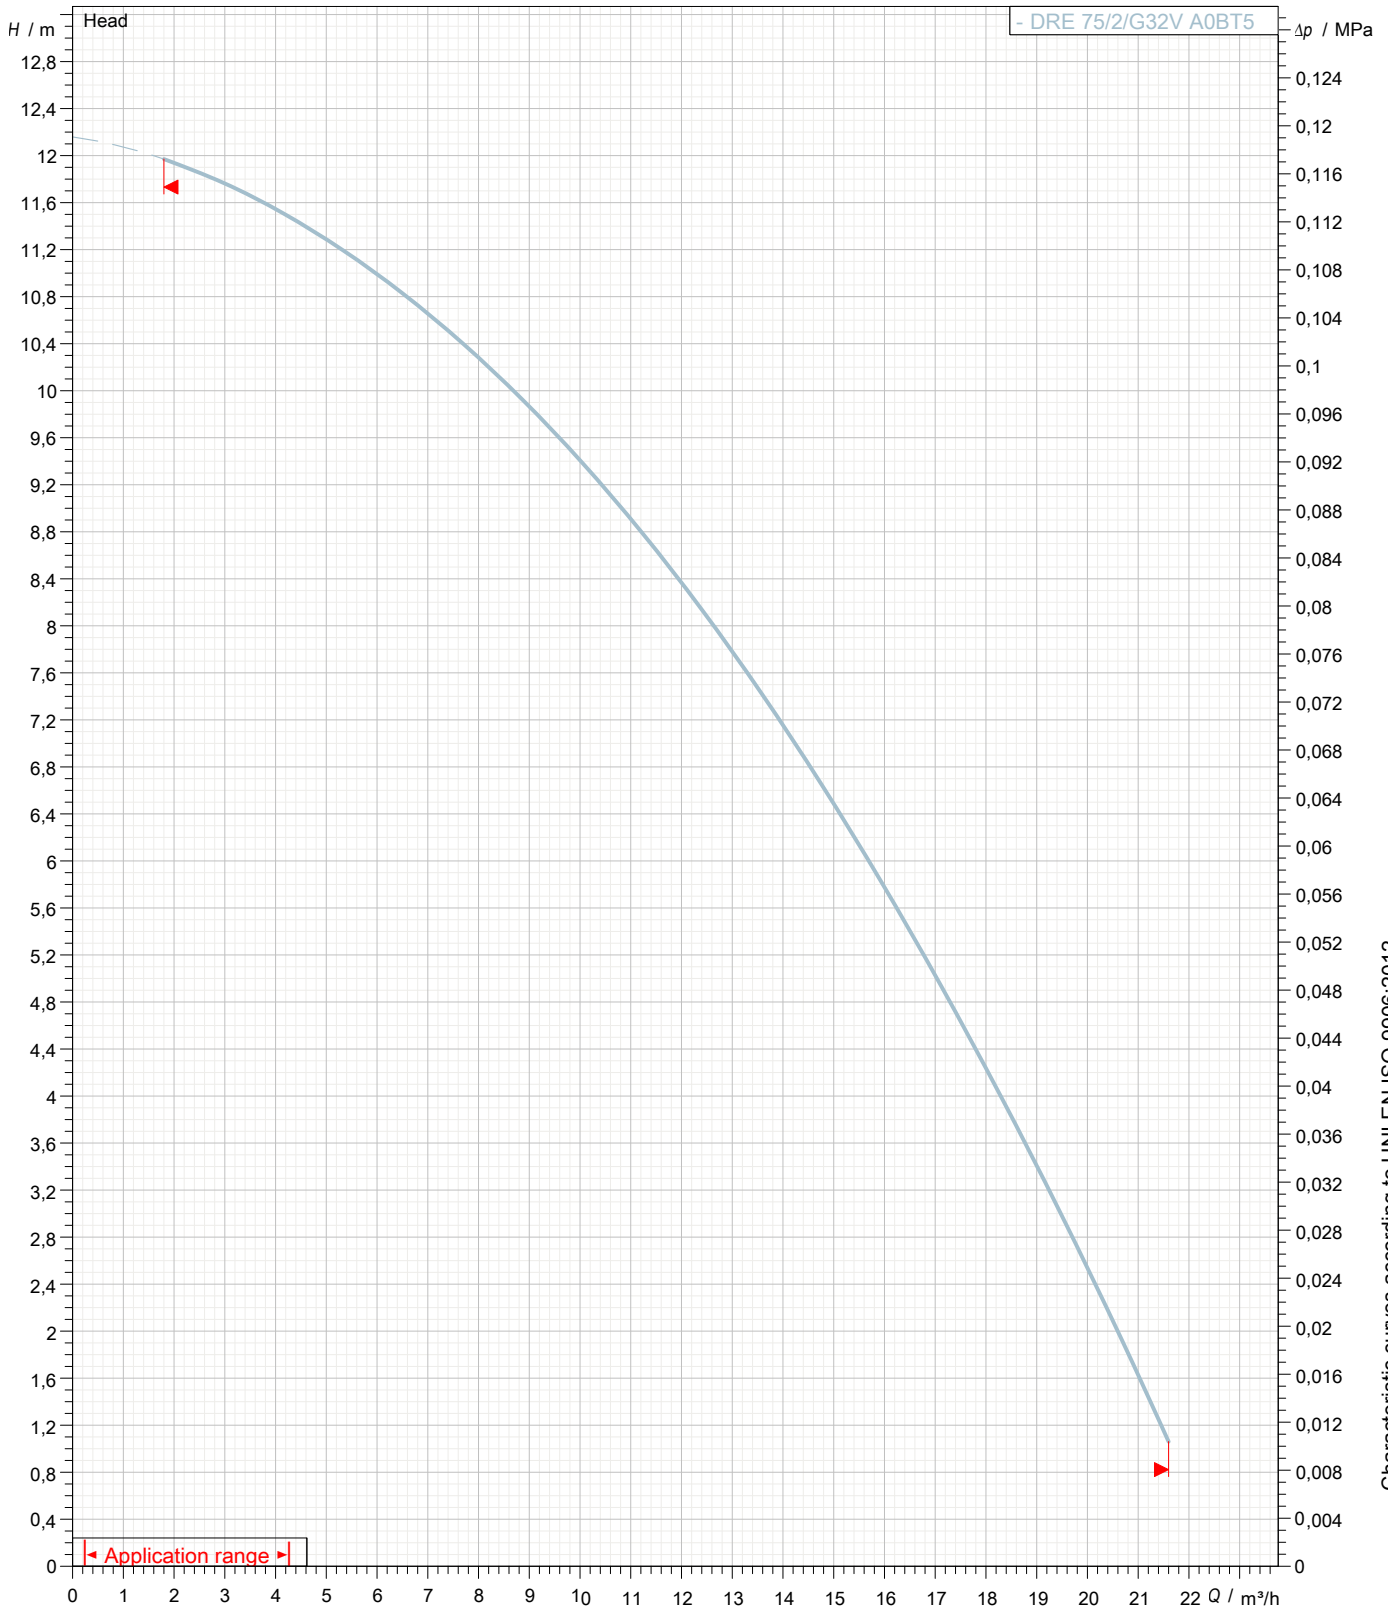

Characteristic curves according to UNI EN ISO 9906:2012